

MATERIALS & FEATURES

- 2 bicycles secured - long term or short term parking solution*
- ASTM A36 Steel for all structural plate (**standard**)
- ¾" Solid Steel Rod
- Polyvinyl protective sleeve

FINISH

DuraPlas® black thermoplastic coating




MOUNTING OPTIONS

- Wall Mount
Each Offset Vertical Bike Rack mounts to concrete masonry walls and wooden ledger boards
- Staging Systems
Staging systems available. See Side Stage™ and Center Stage™ product pages for additional info.
- Rail Wall Mount
May require Unistrut™ rails for wood studded wall mounting, call for details.

SPACE USE RECOMMENDATIONS

Distance from ground to lowest mounting edge: 42"
 Ceiling height: Minimum 92" (**no obstructions**)
 Side wall to rack center:
 Minimum 20", recommended 24"
 Distance between racks center to center:
 Minimum 28", recommended 31"

*Please contact us for additional information on Offset as a long-term parking solution.

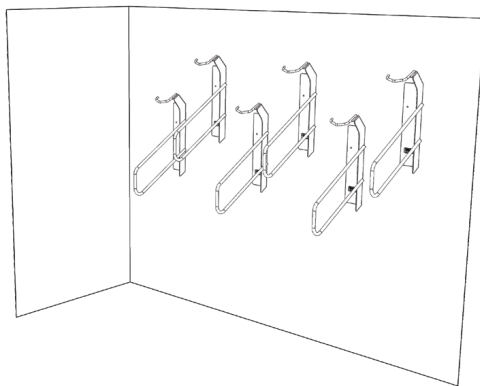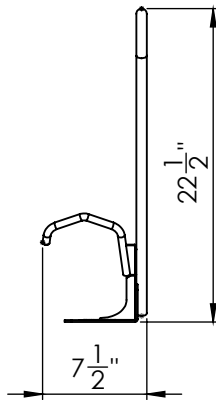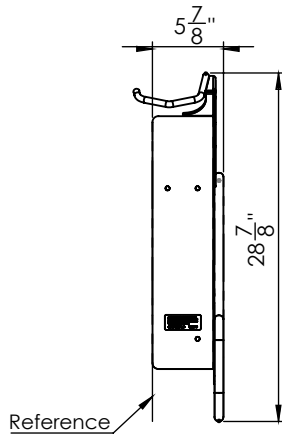

MATERIALS & FEATURES

- Steel ASTM A36 sheet metal
- Laser cut steel bent and welded forms the base plate
- Lock bar made from 3/4" A36 solid steel rod controls bikes and prevents rubbing
- Polyvinyl sleeve on hook to prevent metal-to-metal contact when parking and removing bike
- Tire hook has a large profile to accommodate fat tire bikes (up to 4.8" rims), and has a dimpled center to locate smaller mountain bike and road bike tires.

FINISH

DuraPlas® black thermoplastic coating

MOUNTING OPTIONS

- Direct surface mount to concrete walls
- Can be anchored directly into concrete masonry units
- Wood studs/ledgerboard
- Product can be mounted onto Side Stage™ and Center Stage™ systems when no appropriate backing exists, or wall mounting is not desirable

SPACE USE RECOMMENDATIONS

Distance from ground to bottom of rack minimum: 47"

Ceiling height: 82" minimum, 92" for offset installation (shown)

Side wall to reference point: Minimum 18" left of reference
 Minimum 21.5" right of the reference point

Distance between racks center to center:

- For racks not offset: 31" Minimum, 34" Recommended
- For racks offset: 15.5" Minimum, 17" Recommended