


DETAIL A

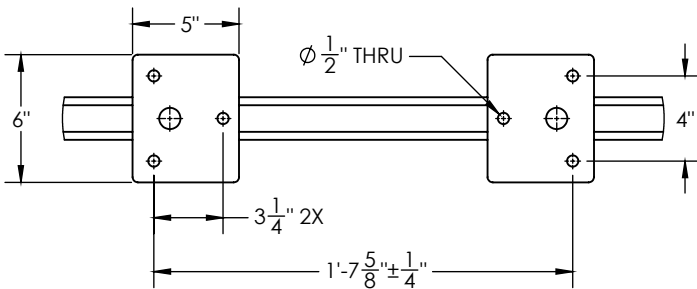

MATERIALS & FEATURES

- HSS 2" x 2" steel square tubing
- U-Lock Compatible
- Circular design allows locking of frame and tire

FINISH OPTIONS

- DuraPlas™ Black
- Hot Dipped Galvanize

MOUNTING OPTIONS

- Surface mount - Concrete **(Anchors Sold Separately)**

SPACE USE RECOMMENDATIONS

- Wall Setbacks:
 For racks parallel to a wall
 Suggested minimum clearance: 24"
- For racks perpendicular to a wall
 Suggested minimum clearance: 34"
- Distance between racks
 Suggested minimum clearance: 34"
- Street Setbacks:
 For racks parallel to the street
 Suggested minimum clearance: 24"

*These are our suggested minimal clearances.

**Please check local ordinances for minimum clearance